

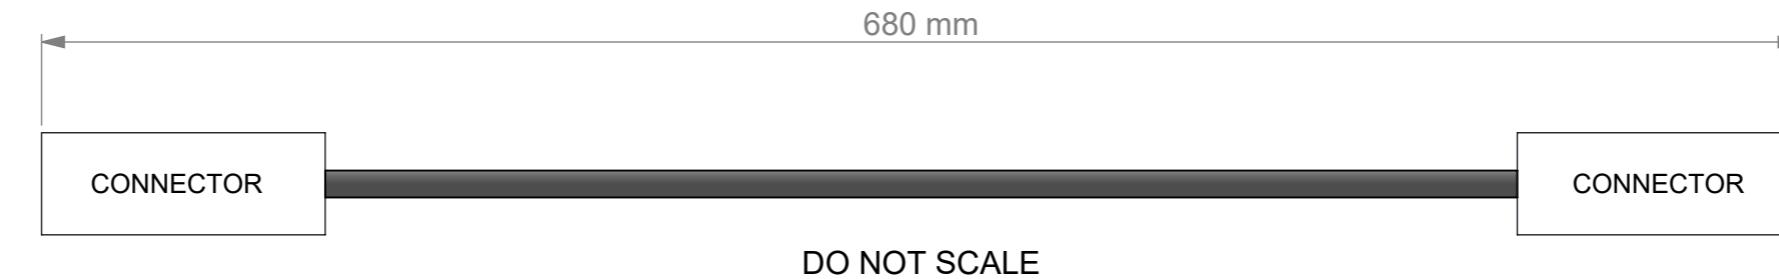


REVISION HISTORY			BY
DATE	REV.	DESCRIPTION	
30-04-2024	B	Updated	LTousgaard

Optimal Cable Length for MAC One on Fourbar or in Grid Mount Ring

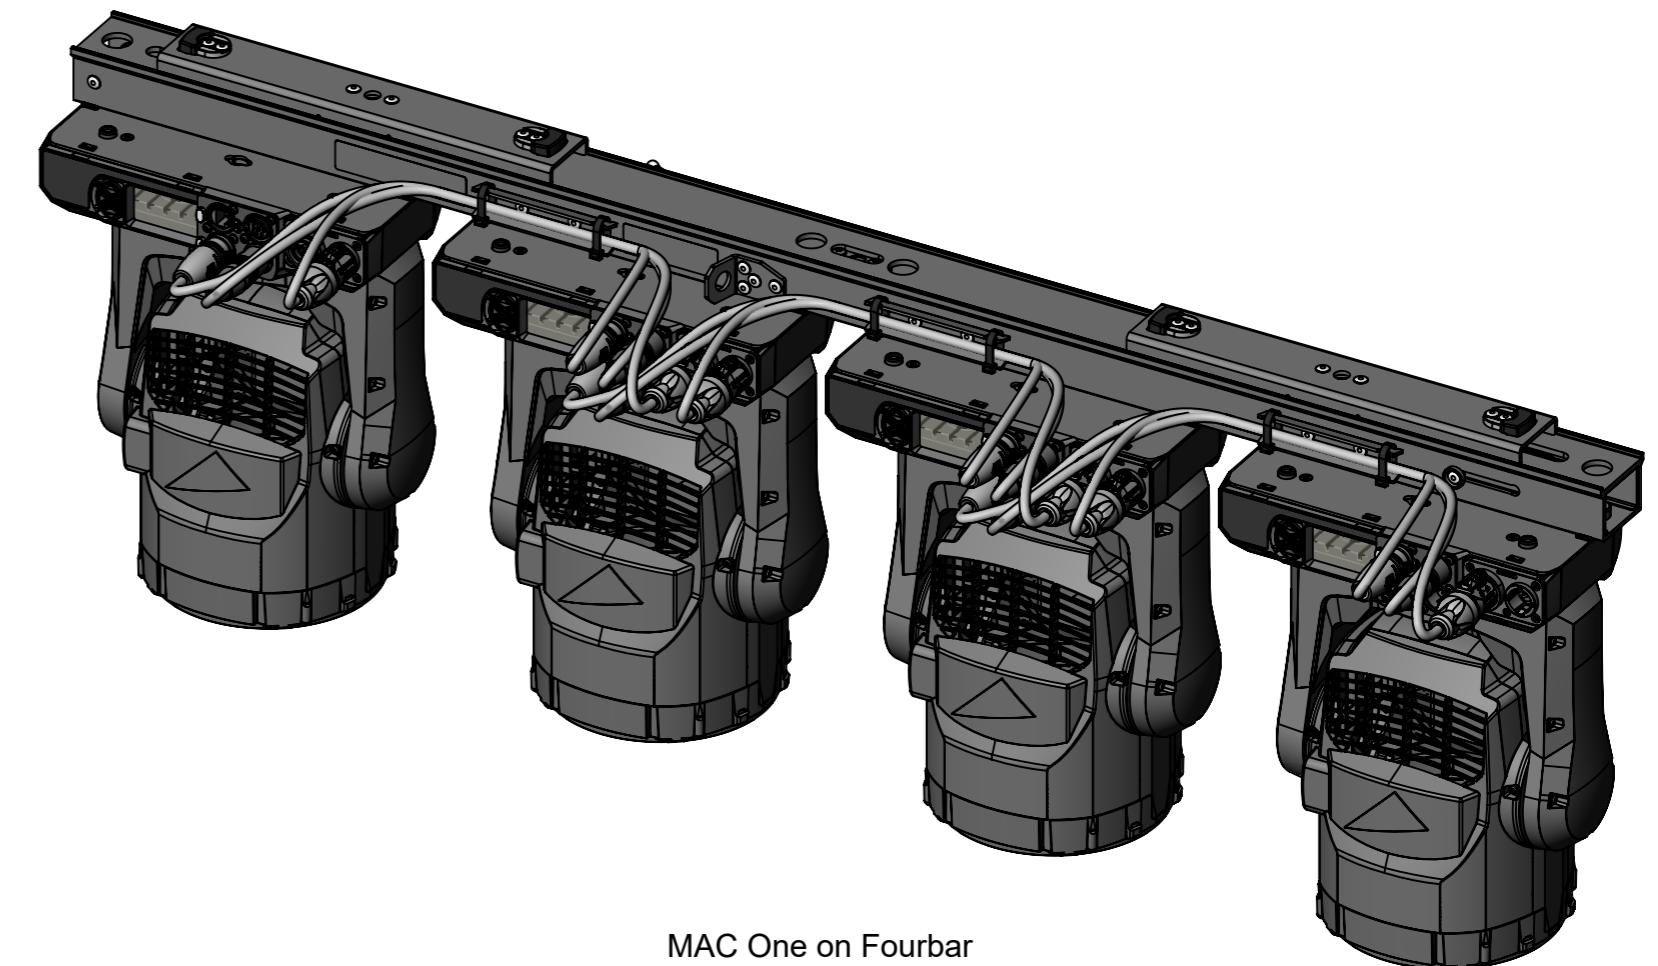

MAC One in Grid Mount Ring

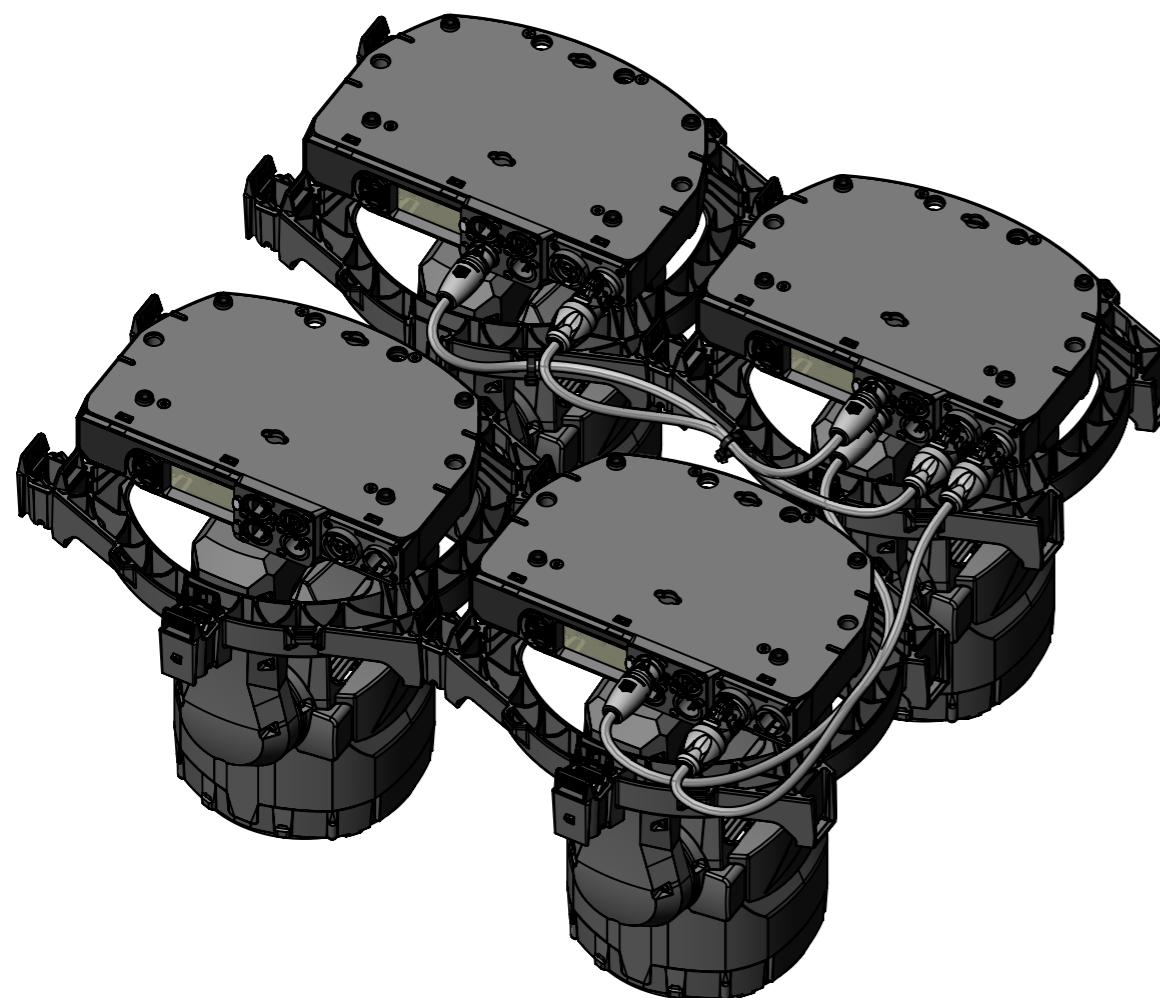

MAC One on Fourbar

© 2023 HARMAN Professional Denmark ApS
PROPRIETARY AND CONFIDENTIAL PROPERTY OF
HARMAN. NOT TO BE DISSEMINATED, REPRODUCED
OR PUBLISH WITHOUT WRITTEN HARMAN APPROVAL.

ROHS
RESTRICTION OF HAZARDOUS SUBSTANCES
ALL MATERIALS USED IN THIS PART MUST BE
ROHS COMPLIANT.
SUPPLIER SHALL PROVIDE A CERTIFICATE OF
ROHS COMPLIANCE WITH THE FIRST ARTICLE.

DIMENSIONS SHOWN ARE FOR REFERENCE AND INSPECTION
ONLY. REFER TO CAD MODEL PROVIDED WITH THIS DRAWING
FOR OVERALL DEFINITION OF PART GEOMETRY.

Material
General linear tolerance

General angular tolerance


General geometrical tolerance

FIRST
ANGLE
PROJECTION

Surface treatment

Color

Project number
10291



Surface treatment

Color

Project number
10291

Martin

TITLE
Optimal Cable Length for
MAC One on Fourbar or in Grid Mount Ring
NO.
REV
B
SIZE
A3
SCALE
1:5
UNIT
mm
DO NOT SCALE
DRAWING
SHEET
1
1

HARMAN Professional
Denmark ApS
Olef Palmes Allé 44
DK 8200 Aarhus N